



PL Oprawa LED typu downlight wpuszczana
 EN Recessed LED downlight
 RU Светодиодный скрытый светильник downlight
 DE Downlight-LED-Leuchte für Einlass-Montage
 HU Süllyesztett LED lámpatest



ORIS

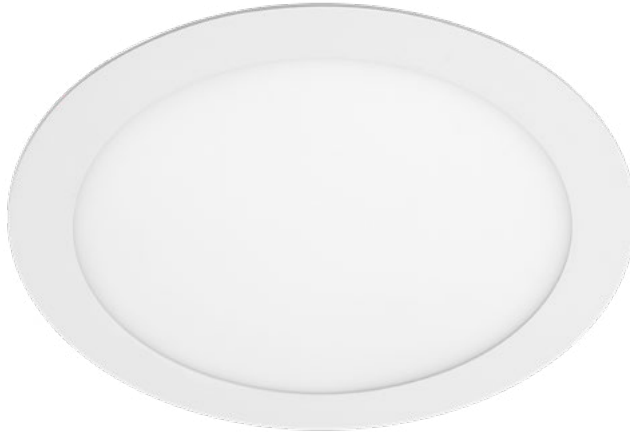

Folder	W	Color	Beam	PF	Material	Weight	Barcode	
LD-ORW03W-CB	3 W	● 3000 K	200 lm	PF > 0,5	aluminium aluminium алюминий Aluminium aluminium	150 g	5902801000768	
LD-ORW03W-NB		● 4000 K					5902801000782	
LD-ORW07W-CB	7 W	● 3000 K	560 lm			220 g	5901867127594	
LD-ORW07W-NB		● 4000 K					5901867158451	
LD-ORW13W-CB	13 W	● 3000 K	1020 lm			350 g	5901867127600	
LD-ORW13W-NB		● 4000 K					5901867158437	
LD-ORW19W-CB	19 W	● 3000 K	1520 lm			550 g	5901867127617	
LD-ORW19W-NB		● 4000 K					5901867158413	
LD-ORW25W-CB	25 W	● 3000 K	2000 lm			PF > 0,9	880 g	5901867127624
LD-ORW25W-NB		● 4000 K						5901867158390

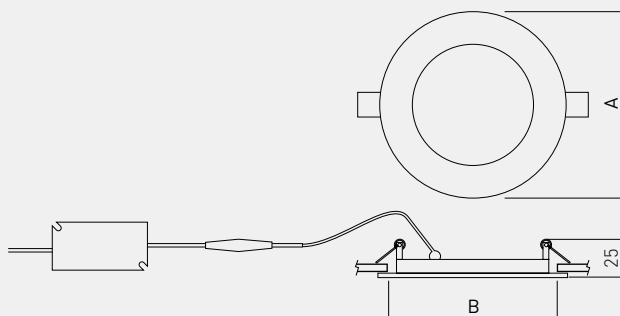

	A	B
3 W	ø 90	ø 62
7 W	ø 120	ø 107
13 W	ø 170	ø 156
19 W	ø 220	ø 210
25 W	ø 300	ø 280